EFFECT OF MONOETHYLENE GLYCOL INJECTION IN HYDRATE MANAGEMENT

Isaac Eze Ihua-Maduenyi[1], Ndidi Emeka Uzoigwe[2], Seth Uba Wadike[3]
[1,2,3] Department of Petroleum Engineering, Faculty of Engineering, Rivers State University
Corresponding author's email: Isaac.ihua-maduenyi@ust.edu.ng

Abstract
The presence of hydrates in deep water oil-gas-field operations is a fairly frequent issue. It is very important to have a hydrate management strategy for normal operation. This work evaluates the optimum mass concentration of monoethylene glycol in hydrate management for a deep water operation conditions. A simulation based approach was adopted and OLGA Dynamic Multiphase flow simulator and Multiflash fluid model modelling package were used. A based model was initially developed and remodelled for different mass concentrations of 10, 20, 30, 40, 44, and, 45 MEG. The results for the actual production with no inhibition, shows that at 2268.53ft along the pipeline that 6.74853 $x10^{-5}$ volume fraction of hydrate was formed at a pressure and temperature of 318.196psia and 3.41765°F in the pipeline. It also reveals that hydrate was form at the inlet section of the pipeline. For 10 mass percent of Monoethylene glycol added to the fluid system reveals 573.651ft and 1.21864x10^{-7} volume fraction of hydrate was formed in the pipeline. Hydrate was thermodynamically unstable up to 573.651ft along the pipeline. After the unstable section, 1.21864x10^{-7} volume fraction of hydrate was formed in the pipeline. Result shows that increase in the mass percent of the MEG increases the length of unstability of the hydrate formation along the pipeline, and increase in the mass concentration of the MEG decreases the volume fraction of hydrate formed in the pipeline. Results further reveal that 45 percent mass concentration of MEG inhibited hydrate formation in the gas mixture.
Keywords: Monoethylene glycol, Hydrate management, Mass concentration, Hydrate formation

1.0 INTRODUCTION

There exist numerous flow assurance challenges concerning natural gas production and transportation (Sloan Jr & Koh, 2007). At any of these stages, natural gas may come into contact with condensed, production/formation water to form ice-like structures known as gas hydrates at certain pressures and temperatures leading to pipeline blockages, pressure build-up, and dangerous projectiles that could rupture the pipeline (Sloan Jr & Koh, 2007). Especially, in the transportation of gas through subsea pipelines from wellhead to onshore processing usually provides the typical conditions of pressure and temperature for the formation of hydrates.

Hydrate formation and its prevention remains a technical challenge for flow assurance in wet gas pipelines. Gas hydrates are crystalline solids formed from water and hydrocarbon gases molecules at low temperatures and elevated pressures. Gas hydrate formation starts with a nucleation step where microcrystalline hydrate particles form. They subsequently agglomerate and grow into large structures that may eventually obstruct the flow inside the pipeline. Hence, hydrate prevention and its management is one of the major focuses for flow assurance (Akpabio, 2013).

The work of Hammerschmidt (1934) was the start of the contemporary era of gas hydrate research. He discovered that the blockage of gas lines at a temperature greater than the ice formation temperature were due to gas hydrates as opposed to normal ice formation (Hammerschmidt, 1934). The capability to predict hydrate formation conditions was another significant development in this field. Katz (1945).and their team of researchers collated the pressure-temperature data from gas hydrate experiments that resulted in the formation of hydrates from varying gases given enough water presence (Katz, 1945).

Gas hydrates are a crystal lattice network made up of common gas components such as methane to butane, acid gases, and nitrogen encaged by molecules of water (Koh, 2002; Sloan Jr and Koh, 2007). The mechanism of gas hydrate formation is built based on the theories pertaining to water crystallization (Sloan Jr & Koh, 2007). The process commences with the nucleation phase which typically happens on the water- gas interface (Sloan Jr & Koh, 2007). Succeeding this phase, the growth of hydrate begins to occur which is a complicated process (thermodynamic) deeply reliant on conditions of mass and heat transfer. As for the dissociation of gas hydrates, it is endothermic and occurs around the hydrate solid (Sloan Jr & Koh, 2007). The process can be instigated by changing the surrounding pressure and temperature of the hydrate solid.

Beyond the environmental impact of gas hydrates, there have also been serious concerns from the gas and oil industries. In 1934, Hammerschmidt first recognized that natural gas hydrates rather than ice were a major potential cause of pipeline occlusion (Hammerschmidt, 1934). As the working areas of the gas and oil production are usually in the deep ocean, the conditions there are favourable for the water and gas to form hydrates, leading to blockages clogging the gas flow in pipelines. Considering the safety risks and economic loss caused by hydrate blockages, many methods have been employed to prevent their formation. Typical methods are heating the system to a temperature above the hydrate formation at the system pressure (Lili et al., 2021), drying the gas (Hubbard, 1991), and chemical control using inhibitors (Odutola et al., 2014). Chemical control of hydrates involves using chemicals to alter the hydrate formation condition of pressure and temperature or to delay hydrate nucleation, growth and agglomeration.

The control and prevention of gas hydrates may typically be achieved by chemical injection, thermal heating, depressurization, dehydration, and water removal (Son and Wallace, 2000). In terms of chemical injection, a hydrate inhibitor such as MEG as opposed to methanol is widely employed due to it being the safer, cleaner, and re- usable (through MEG regeneration) alternative (Brustad et al., 2005). Where MEG is utilized as part of the hydrate control philosophy for a field, MEG begins its journey after the wellhead mixing with the produced hydrocarbon, ultimately dropping the thermodynamic hydrate phase equilibrium to lower temperatures (Son and Wallace 2000). At the onshore arrival facilities, the production fluid is separated and pre- treated.

Okereke et al. (2020) investigated and published that MEG inhibited the hydrate mass fraction formation by mainly controlling the temperature condition. As MEG is widely used as a hydrate inhibitor, its regeneration and reclamation processes become vital to the overall natural gas production and processing (Odeigah & Pojtanabuntoeng, 2022).

The use of MEG especially in the context of regeneration leads to the challenge of MEG degradation whether oxidative or thermal. Preliminary research suggests that MEG undergoes thermal degradation at certain temperatures generating organic acids, specifically formic and acetic acids (AlHarooni, et al., 2015). Studies of the effect of MEG injection on prevention of hydrate formation in natural gas pipeline have been the subject of many investigators. The efficiency of glycols as inhibitors of hydrate formation in natural gas especially in offshore transportation pipeline has been studied by several researchers. Considering the usefulness of MEG injection in preventing hydrate formation in the industry, the purpose of the present work is to evaluate the effect of Monoethylene Glycol in hydrate management and its optimum concentrations for hydrate formation prevention in gas transmission pipeline using OLGA Dynamic Multiphase flow simulator and Multiflash fluid model modelling package.

2.0 MATERIALS AND METHOD

3.1 MATERIALS

The materials (data and software) used in this study to evaluate the effect of Monoethylene Glycol in hydrate management and its optimum concentrations for hydrate formation prevention in gas transmission pipeline includes the following: OLGA Dynamic Multiphase flow simulator, multiflash fluid model modelling package, analysis of the fluid (components and compositions), pipeline material and geometry data (length, elevation, wall roughness, internal diameter, heat capacity, density, thermal conductivity), and operating conditions of the pipeline (pressure, temperature and flow rate).

3.1.1 Gas properties for hydrate and PVT table files creation

Hydrate table file (.hyd) and PVT table file (.tab) are the two most essential files required to run a hydrate simulation in OLGA. These files contain pressure and temperature values for hydrate calculation and PVT parameters. Table 1 shows the gas composition which was used as a feed into Multiflash package for the generation of hydrate and PVT files respectively.

Table 1: Fluid composition and mole percent

Composition	Mole (%)	Composition	Mole (%)
Methane	88.322	n-Hexane	0.177
Ethane	6.755	n-Heptane	0.132
Propane	1.995	n-Octane	0.05
i-Butane	0.688	n-Nonane	0.012
n-Butane	0.769	n-Decane	0.005
i-Pentane	0.388	Water	0.121
n-Pentane	0.183	Nitrogen	0.237
		Carbon dioxide	0.166

3.1.2 Pipeline materials and geometry data

The gas pipeline is 28500ft in length. In order to simulate it using OLGA software, the pipeline geometry in the model was assumed to consist of 5 pipe segments. Table 2 shows the pipeline geometry data. It has an elevation of zero to a length of 5700ft along the pipeline before its elevation increases from zero to 20ft. Figure 1 shows the flow path plot of the pipeline.

Table 2: Pipeline geometry data

Pipeline Geometry Data					
PIPE	**Length [ft]**	**Elevation [ft]**	**Wall Roughness [in]**	**Diameter [inches]**	**Section**
PIPE-1	5,700	0	0.05	14	10
PIPE-2	5,700	5	0.05	14	10
PIPE-3	5,700	5	0.05	14	10
PIPE-4	5,700	5	0.05	14	10
PIPE-5	5,700	5	0.05	14	10

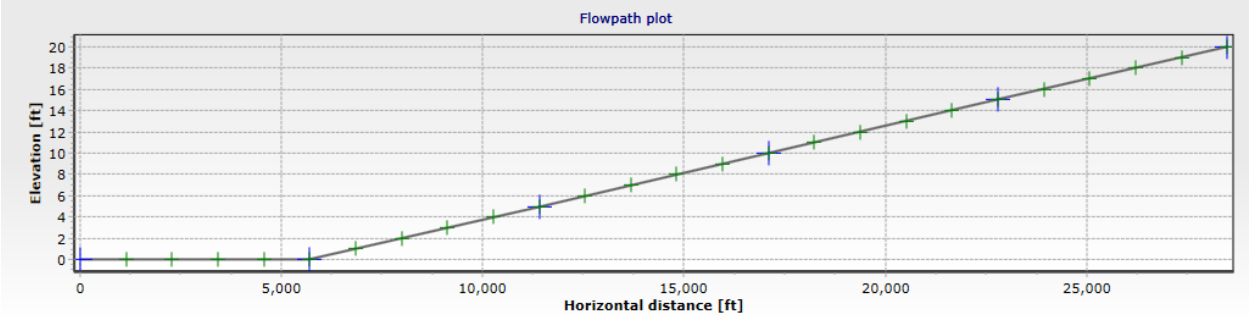


Figure 1: Flowpath of the pipeline

The carbon steel pipeline material properties used in the OLGA simulation model were 502.416 J/Kg-K heat capacity, 54W/m-K thermal conductivity, 7850 kg/m^3 density and 19.05mm pipe wall thickness. It was coated with a layer of Poly Ethylene Foam having a thermal conductivity of 0.04 W/m.K, heat capacity of 2300 J/kg.K, density of 32kg/m^3 and a wall thickness of 25.4mm. These data are presented in Table 3.3.

Table 3: Pipeline material properties

	Pipeline material properties			
	Thermal Conductivity [W/m.K]	**Density [kg/m^3]**	**Heat Capacity [J/kg.K]**	**Wall thickness [mm]**
Carbon Steel	54	7850	502.416	19.05
Poly Ethylene Foam	0.04	32	2300	25.4

3.3 Methods

Hydrate formation modelling performed in this work was done with OLGA v2017.2.0.107 and Multiflash v6.1. The study approach adopted in this work was to establish the possibility of hydrate formation in the pipeline first before the addition of Mono Ethylene Glycol (MEG). Multiflash was utilized as a phase behavior properties engine to generate input file into the OLGA model. OLGA reads these tables at a particular condition of pressures and temperatures within the pipeline system and uses that for multiphase calculations. This may include interpolation between values on the table of properties. The fluid composition was used as a basis for phase behavior modeling within Multiflash for the phase behavior model input to OLGA. The preconfigured model setup available was used to define the Hydrates model. The chosen equation of state (EOS) for the characterization of the PVT data was CPA-Infochem. The model selection screen is as shown in figure 2.

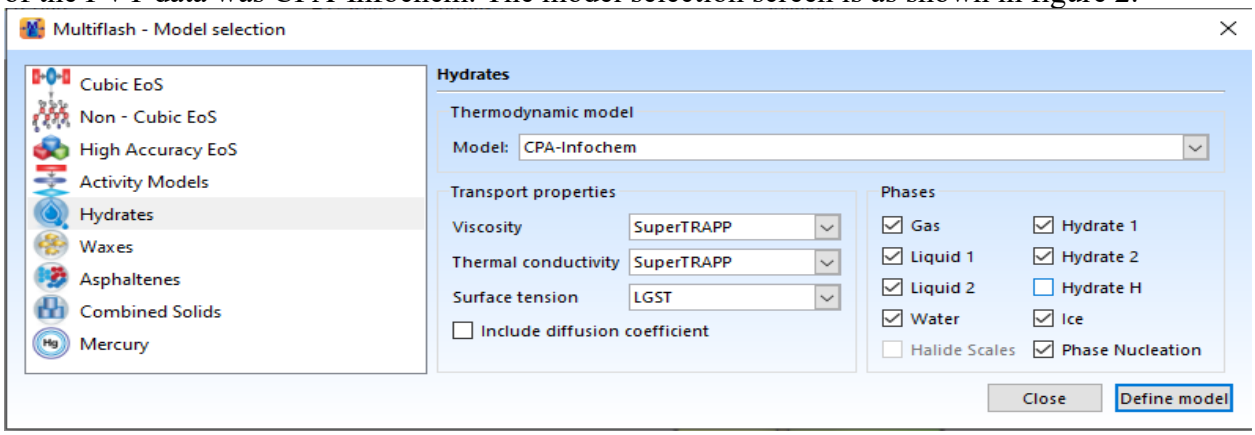


Figure 2: Model selection screen

The components that make up the fluid system were selected to make the component available on the fluid composition panel in order to enter the amount of each component. The component library screen is as shown in figure 3.

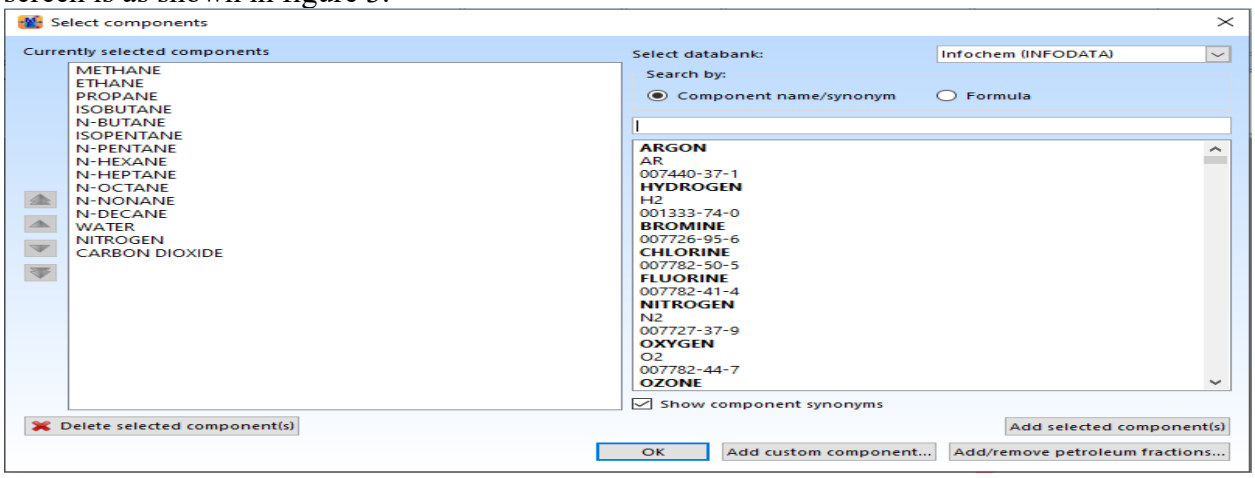


Figure 3: Infochem component databank

The amount of each component was then entered in the fluid composition panel. These components were used to create the hydrate and PVT files. These tables are required in the model to predict the hydrate formation conditions of the fluid of interest. The Multiflash PVT and hydrate file generation screen is shown in figure 4.

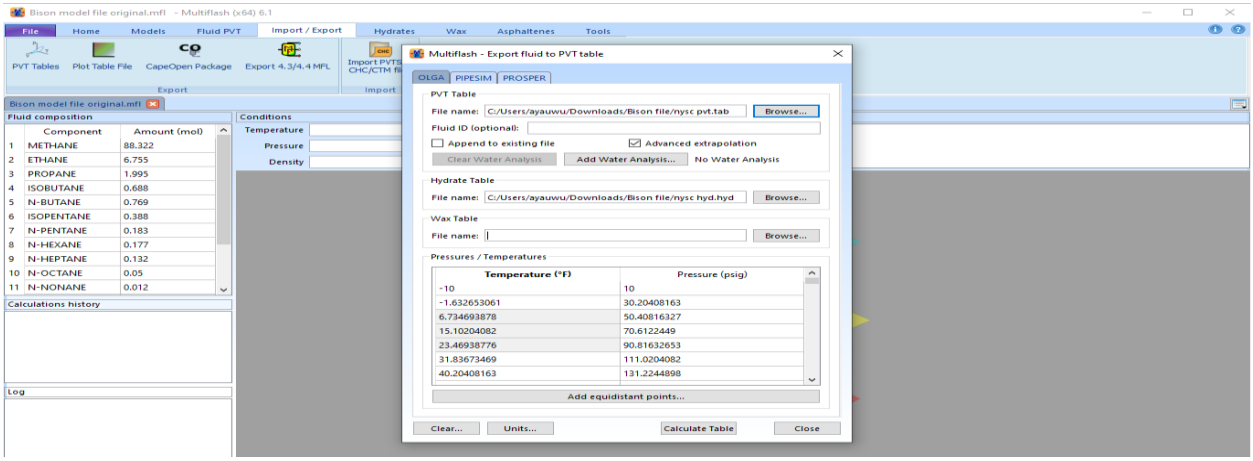


Figure 4: Fluid file generation screen

The generated hydrate table and PVT table files were then imported into OLGA. An empty OLGA case was created and the flow path together with the nodes representing the inlet and outlet of the pipeline were selected. The gas transmission line consists of a closed node at the beginning of the pipeline with a mass source at the inlet, a flow path representing the pipeline and a pressure node at the end of the pipeline which is set at 30psig and 20°F. The pipeline materials and geometry data were used to define the pipeline. The environment surrounding the gas pipeline has an ambient temperature of 6°F. The CSMHyK model was selected in the hydrate model option with structure II hydrate selected as the hydrate phase. The default subcooling value was used as the allowable temperature difference between the hydrate formation temperature and the fluid temperature before nucleation will occur. The heat transfer from the pipeline wall to the surroundings and a mass source rate of 4kg/s were defined the heat transfer and source keys respectively. Also, the gas pipeline was selected as the flow path where OLGA is going to check for hydrate by adding Hydrate check, which tells if hydrate will form, hydrate kinetic, which tells how fast hydrate is going to form and hydrate Option under the FA Models. The simulation end time was set to 1 hour. The OLGA screen together with the developed gas pipeline model is shown in figure 5.

These same procedures were repeated for the case of the addition of Monoethylene Glycol inhibitor to the fluid composition using the inhibitor calculator. After the inhibitor was added to the fluid system, the hydrate phase boundary was check to see the inhibition effect of addition of the inhibitor to the fluid stream.

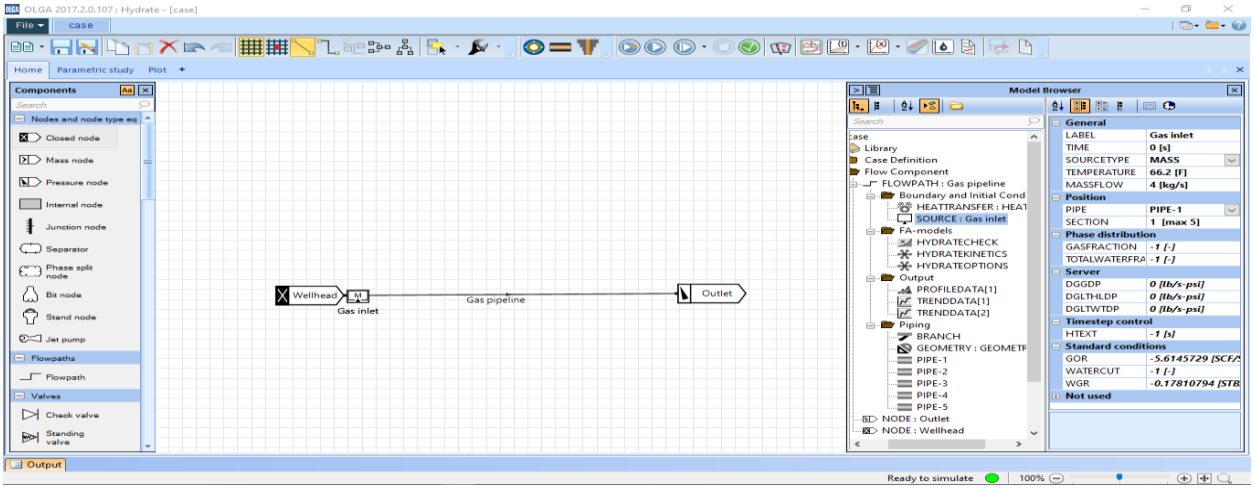


Figure 5: OLGA gas pipeline model

3.4 Sensitivity analysis and conditions

Sensitivity analyses were conducted to determine the optimum concentration of MEG required to supress hydrate formation in the pipeline. Mass concentration of 0%, 10%, 20% 30%, 40%, 50% and 60% each of MEG was injected into the pipeline to see their effect on hydrate formation tendencies.

3.0 RESULTS AND DISCUSSIONS

3.1 Phase envelope

A phase envelope was developed to understand the phase changes (gas/liquid/hydrate) in the system at different condition of temperatures and pressures. The phase envelope curve for the gas sample is as shown in figure 6. It reveals a critical point of -71.301°F and 999.637psig. Results shows that hydrate II phase was present at a temperature of 38.35°F above the ice point. Liquid fractions are present in the hydrocarbon mixture at all temperature conditions below this critical temperature and pressure.

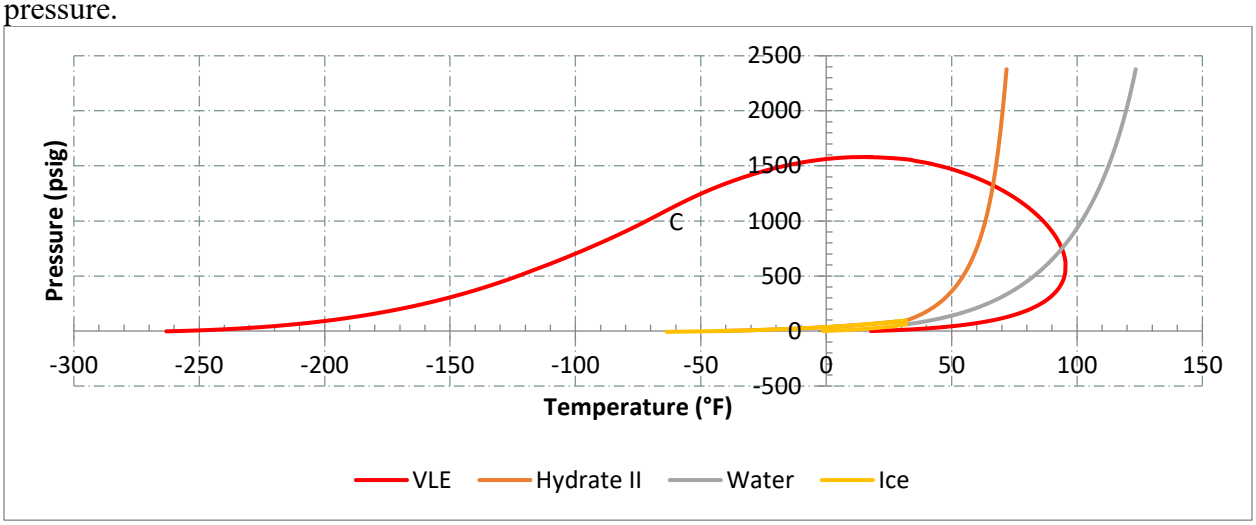


Figure 6: Phase envelope of the gas sample

3.2 Hydrate Dissociation and Nucleation curve

The hydrate nucleation curve represents when hydrate would theoretically form crystals instantly. The nucleation curve is based on the stochastic behavior of how hydrate crystals form and provides an estimate of the condition that cause hydrate crystals to go from meta-stable to stable. The hydrate dissociation temperature is the temperature below which hydrates can form. The hydrate dissociation calculation is an example of a fixed phase fraction flash. The hydrate nucleation temperature is the temperature at which the nucleation of hydrates occurs and hydrates can form. Figure 7 shows the hydrate dissociation and nucleation curves.

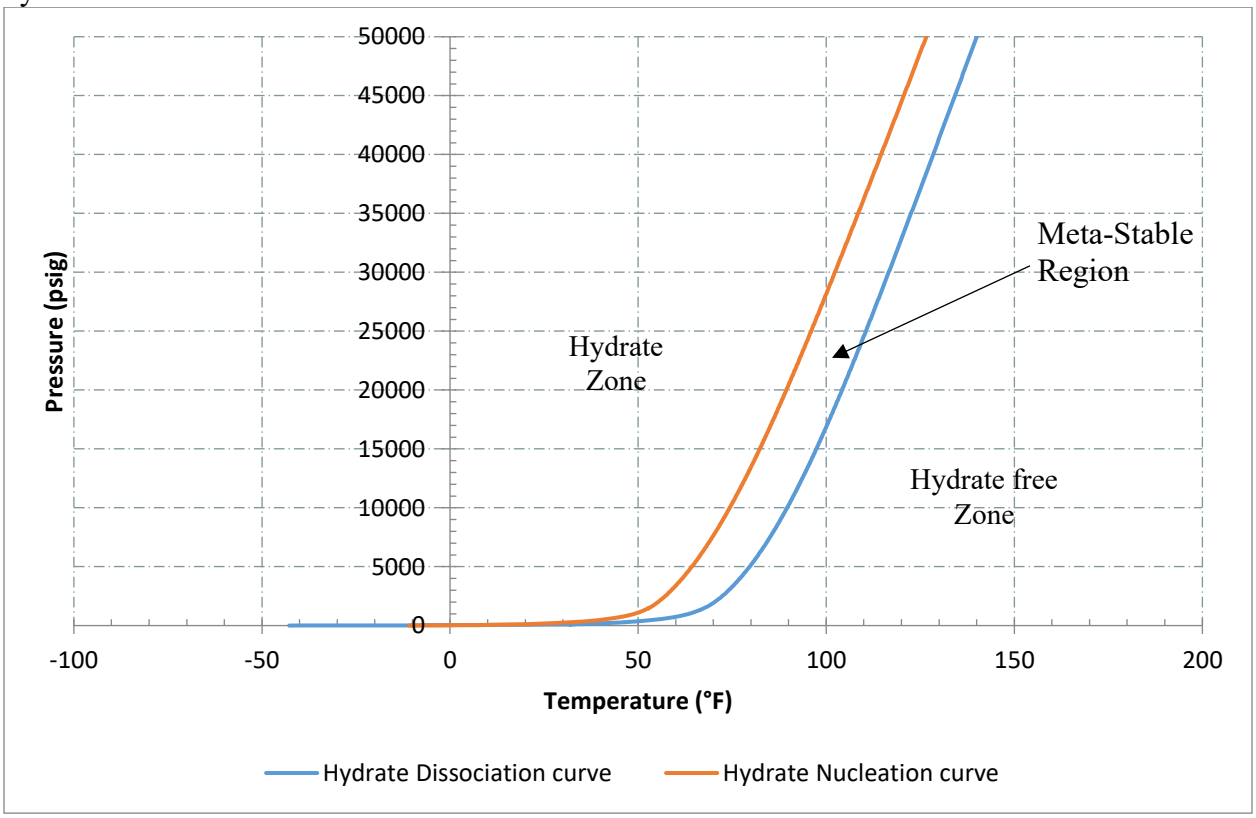


Figure 7: Hydrate Nucleation and Dissociation curves

To the left of the curves (towards lower temperature and higher pressure) is where hydrates are thermodynamically stable and to the right of the curves represent the area where hydrates do not exist as illustrated in figure 7. Between the dissociation and nucleation temperatures is the area of hydrate risk where hydrates may or may not form, depending on the time scale and kinetics of the formation process. The formation and dissociation temperatures vary with pressure, as shown in the figure. The dissociation temperature and pressure and the nucleation temperature and pressure are determined with a fixed phase flash calculation. From the calculation, it was observed that the hydrate has a dissociation temperature of 41.701°F at 200 psig. HYDRATE II was observed to be the most stable hydrate phase at the specified pressure. HYDRATE II was also the most stable hydrate phase at the specified temperature with a dissociation pressure of 68.622 psig at 20°F.
To calculate the hydrate nucleation temperature, a fixed phase flash calculation was used. The result shows that at 20°F, the hydrate phase starts to nucleate at a pressure of 120.330 psig, i.e. the hydrate crystals to go from a meta-stable state and start to form at this condition. More so, at 200 psig, the hydrate nucleation temperature is 27.146°F. Table 4 shows a summary of the result from the calculation.

Table 4: Hydrate formation and dissociation calculation result

Fixed	Hydrate formation value	Hydrate dissociation value
Temperature (20°F)	120.330 psig	68.622 psig
Pressure (200 psig)	27.146°F	41.701°F

4.3 Effect on hydrate dissociation of adding a Mono Ethylene Glycol (MEG) inhibitor

Thermodynamic hydrate inhibitors decrease the temperature or increase the pressure at which hydrates will form from a given gas mixture. The effect of MEG inhibitor was investigated by adding it to the list of components. The inhibitor calculator was used to calculate the amount of MEG inhibitor to be added to the amount of water present in the fluid in order to reach a user-defined inhibitor concentration. Figure 8 shows the inhibition effect of adding MEG to the gas stream. The curves on the figure shows the effect of adding 0%, 10%, 20%, 30%, 40%, 50%, 60%, 70% and 80% mass concentration of MEG. The 0% concentration of MEG represents the normal fluid without any MEG. At 727 psig, hydrate may form at 60°F. If the pressure is increased further to 2000psig, hydrate may even start to form at a higher temperature (70°F). But by just adding 30% mass concentration of MEG to the fluid system, the hydrate curve has been lifted to the left and the hydrate at the same pressure (727psig) is forming at 54°F.

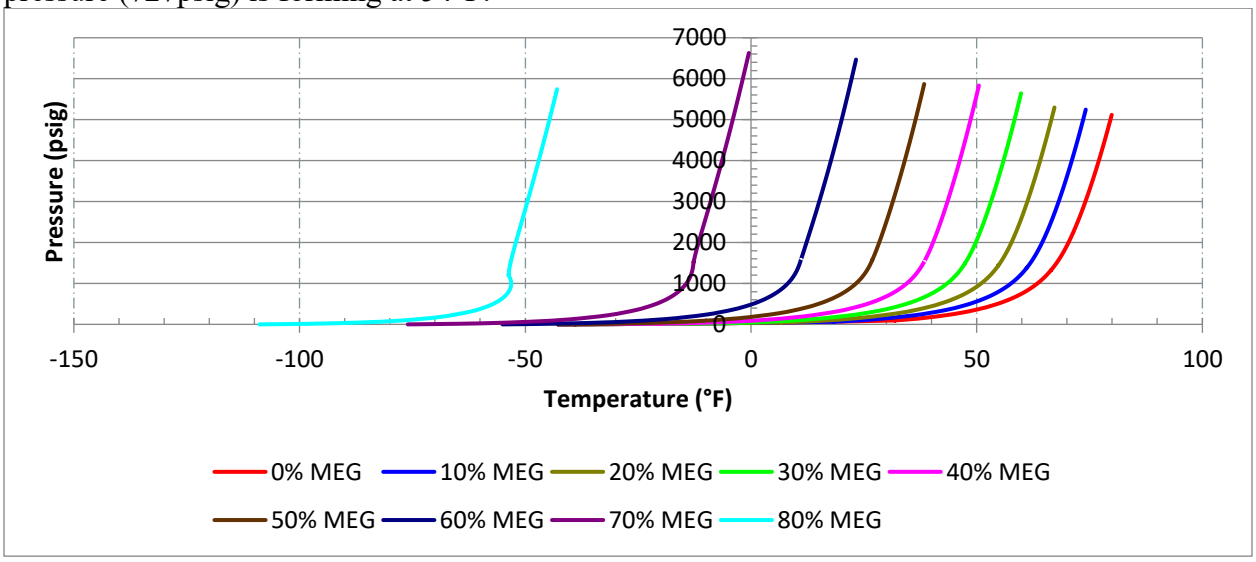


Figure 8: Effect of MEG Concentration on hydrate dissociation (hydrate curve).

Therefore, from the figure as the inhibitor concentration increases, the hydrate dissociation temperature i.e., the temperature below which hydrate will form is reduced for a given pressure.

4.4 Hydrate formation in the pipeline for the case of no inhibition

Figure 9 shows the section and hydrate variables. The red line is the hydrate formation temperature, the black line is the hydrate volume fraction, the blue line is the section pressure and the green line is the section temperature. The figure shows that at 2268.53ft along the pipeline that 6.74853 $x10^{-5}$ volume fraction of hydrate has formed the pipeline for a pressure of 318.196psia and a temperature of 3.41765°F in the pipeline. Also, the figure reveals that a hydrate volume fraction of 9.31962 $x10^{-5}$ has formed at 26544.4ft for a pressure 94.9207psia and a temperature of 3.41765°F existing in the pipeline section. It also reveals that hydrate will form right from the inlet section of the pipeline.

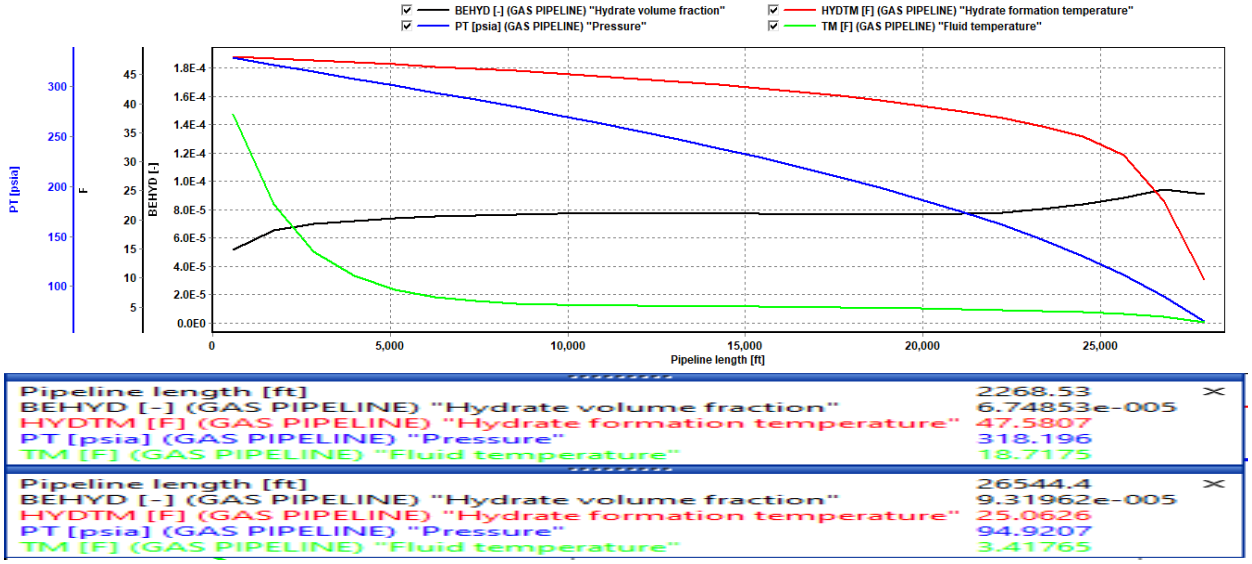


Figure 9: Section and hydrate variables for the case of no inhibitor

This is also evident by the result showing the difference between the hydrate and section temperature (DTHYD) as shown in figure 10. The figure shows that the variable DTHYD was positive throughout the entire pipeline length. This means that hydrate will form in the pipeline.

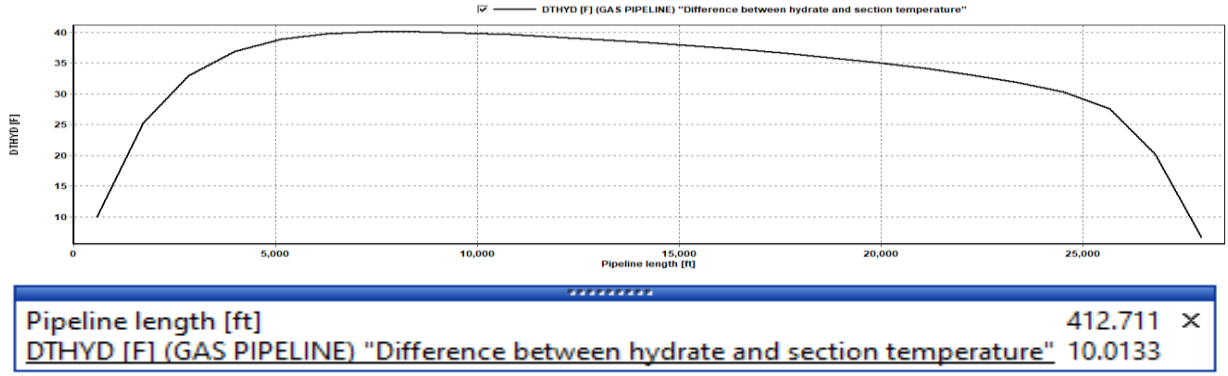


Figure 10: DTHYD for the case of no inhibitor

4.4.1 Effect of 10 mass percent of MEG on hydrate formation

This is a case in which 10 mass percent of Monoethylene glycol was added to the fluid system. Figure 11 shows the section and hydrate variables along the length of the pipeline. The figure shows that hydrate was thermodynamically unstable until 573.651ft along the pipeline. At this point about 1.21864x10^{-7} volume fraction of hydrate has formed in the pipeline.

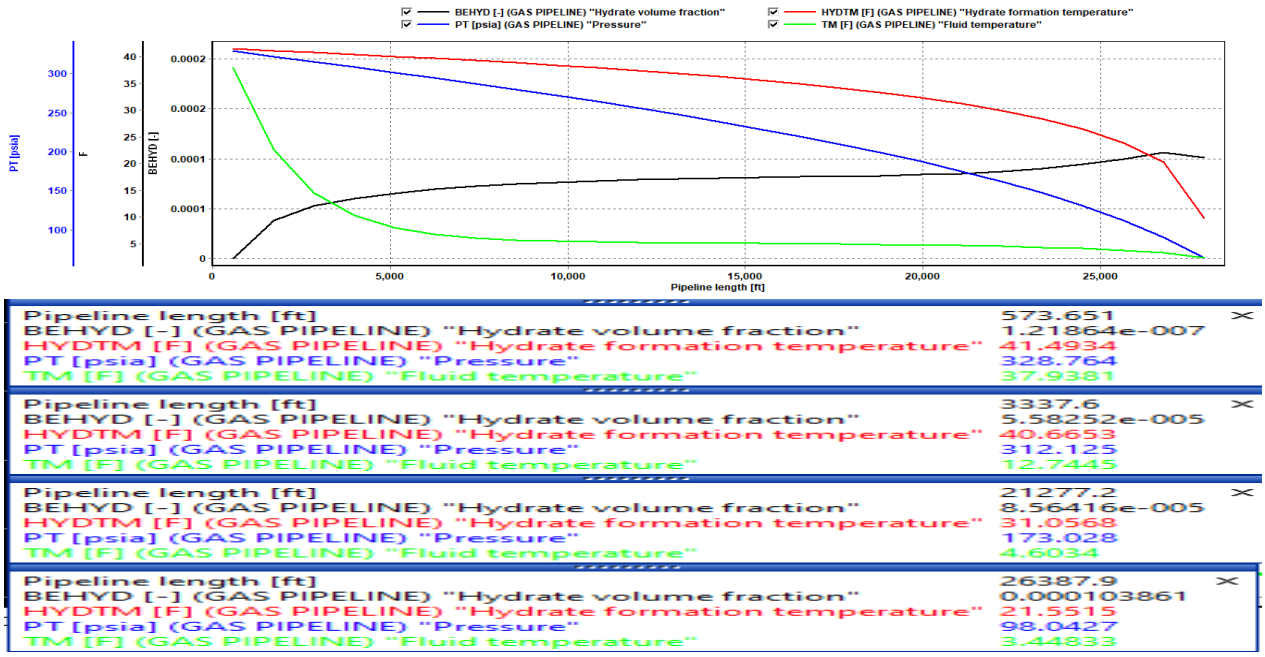


Figure 11: Section and hydrate variable for the addition of 10 mass percent of MEG

Figure 12 is the profile of the variable DTHYD which is the difference between the hydrate equilibrium temperature and the section temperature for the entire pipeline. The figure shows that the variable was positive for the entire pipeline length, meaning that the hydrate equilibrium temperature was higher than the section temperature and therefore hydrate will form in the pipeline.

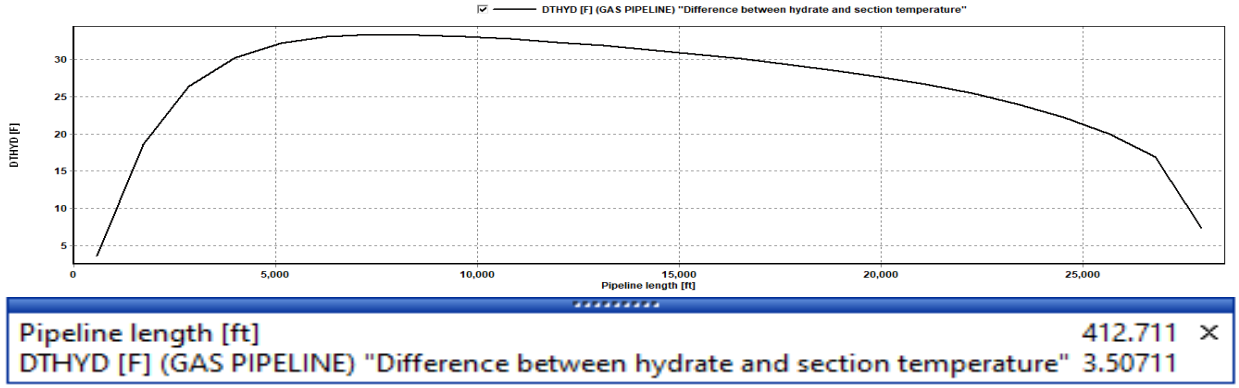
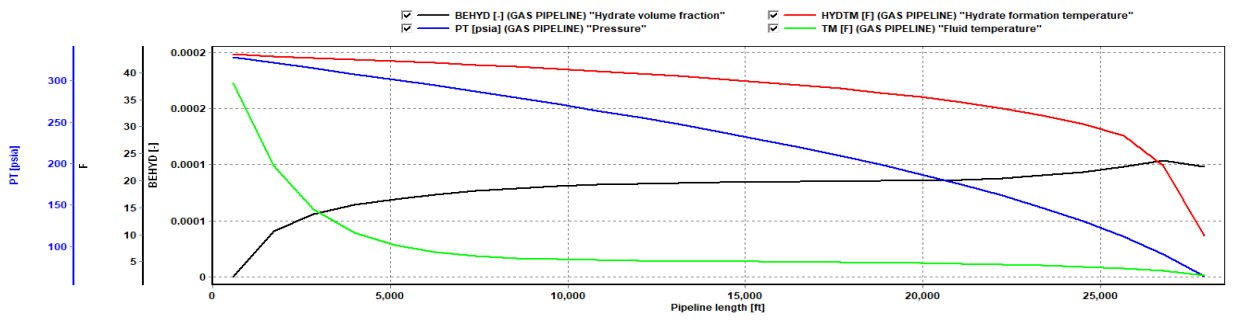


Figure 12: DTHYD for the addition of 10 mass percent of MEG

4.4.2 Effect of 20 mass percent of MEG on hydrate formation

This is a case in which 20 mass percent of Monoethylene glycol was added to the fluid system. Figure 13 shows the section and hydrate variables along the length of the pipeline. The figure shows that up about 573.651ft along the pipeline that the hydrate was thermodynamically unstable. At this point about 1.30194×10^{-7} volume fraction of hydrate has formed in the pipeline.



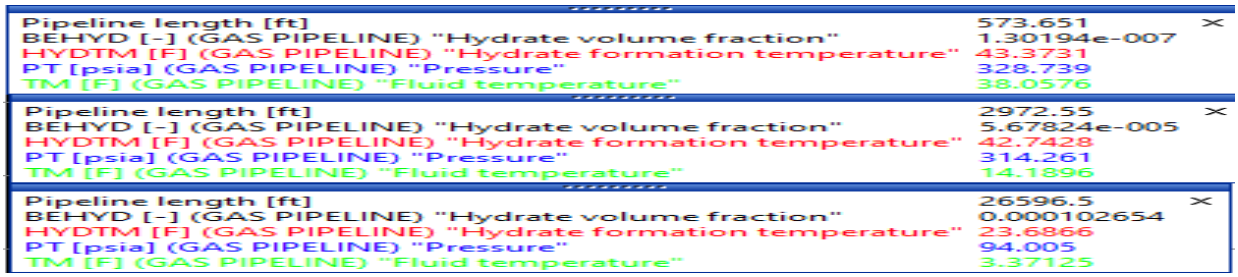


Figure 13: Section and hydrate variable for the addition of 20 mass percent of MEG

Figure 14 shows the difference between the hydrate equilibrium temperature and the section temperature. The figure shows that this variable was positive throughout the entire pipeline length. This means that the entire pipeline length is susceptible to hydrate formation.

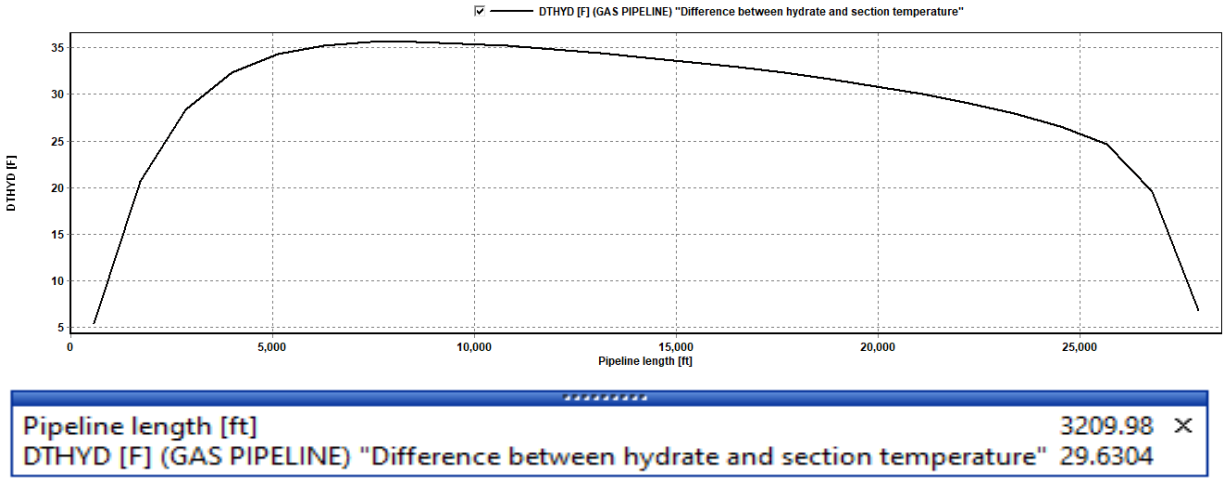


Figure 14: DTHYD for the addition of 20 mass percent of MEG

4.4.3 Effect of 30 mass percent of MEG on hydrate formation

This is a case in which 30 mass percent of MEG was added to the fluid system. Figure 15 shows the section and hydrate variable for the entire pipeline length. With the presence of 30 mass percent of MEG in the pipeline, the hydrate was thermodynamically unstable up to 1747.03ft along the pipeline length. At this point, about 5.9057×10^{-7} volume fraction of hydrate has formed in the pipeline.

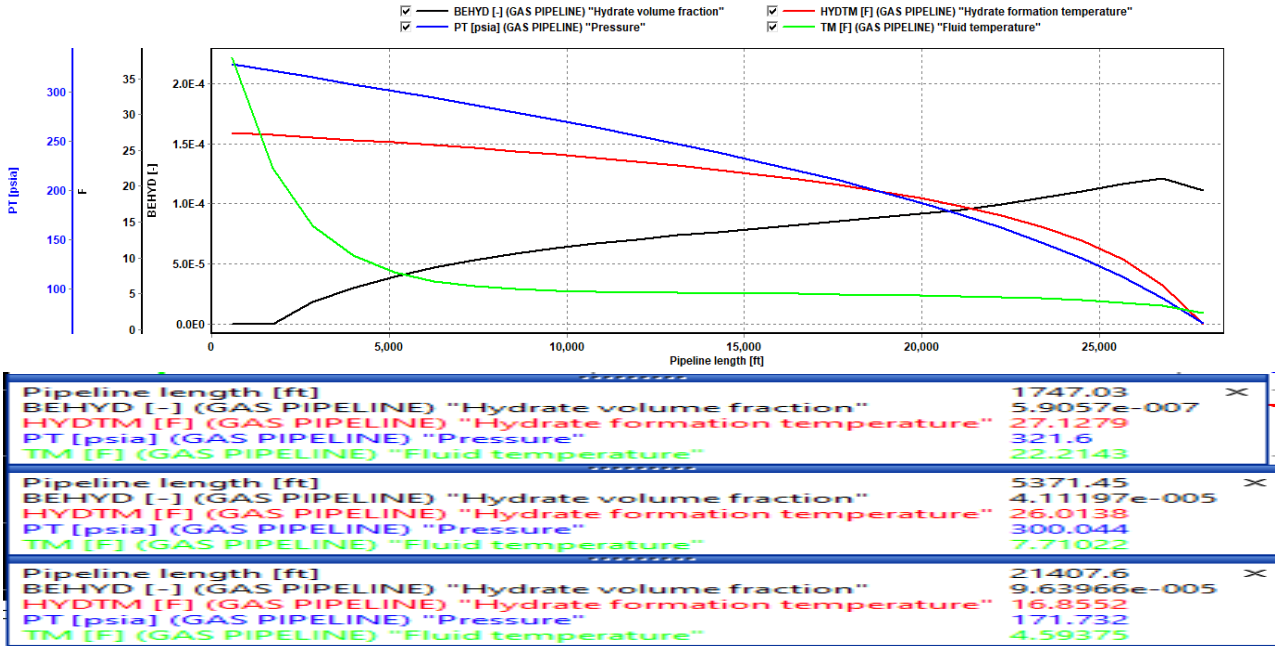


Figure 15: Section and hydrate variable for the addition of 30 mass percent of MEG

Figure 16 shows the effect of 30 mass percent concentration of MEG on the difference between the hydrate equilibrium temperature and the fluid temperature. The figure shows that at the beginning of

the pipeline, the variable DTHYD was negative before it changes to positive at some point along the pipeline length. Hydrate will be thermodynamically unstable along the section of the pipeline where DTHYD was negative and stable along the section of the pipeline where DTHYD is positive.

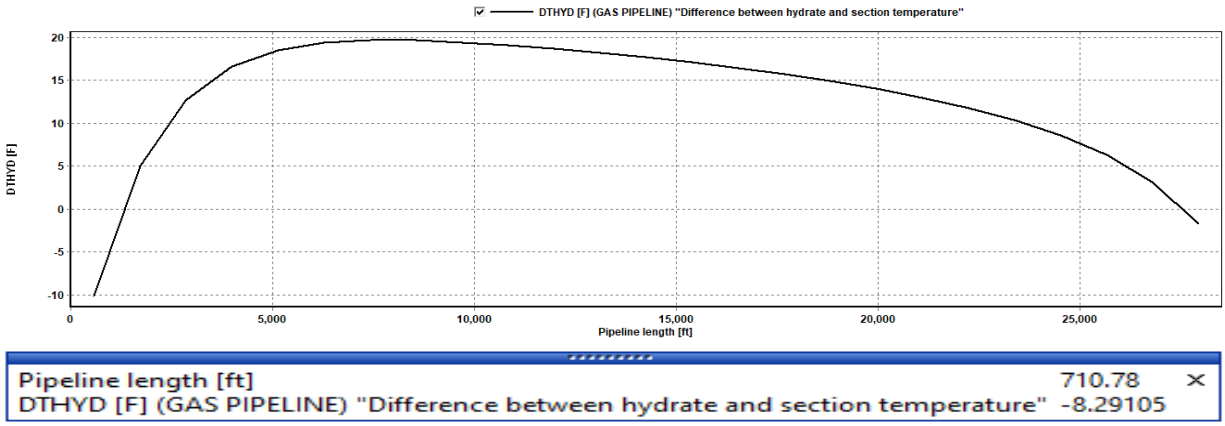


Figure 16: DTHYD for the addition of 30 mass percent of MEG

4.4.4 Effect of 40 mass percent of MEG on hydrate formation

This is a case in which 40 mass percent of MEG was added to the fluid system. Figure 17 shows the section and hydrate variable for the entire pipeline length. With the presence of 40 mass percent of MEG in the pipeline, the hydrate was thermodynamically unstable up to 2868.25ft along the pipeline length. At this point, about 1.37687×10^{-7} fraction of hydrate has formed in the pipeline. At 2294.6ft, no hydrate was present in the pipeline at a pressure of 317.318psia and 18.3325°F. Also, at 11029.7ft and a pressure and temperature conditions of 261.749psia and 5.27548°F, 4.30134×10^{-5} volume fraction of hydrate has form in the pipeline. For a pressure and temperature conditions of 204.057psia and 4.85276°F existing at 18148.2ft along the pipeline, 6.3492×10^{-5} volume fraction of hydrate will form at this point.

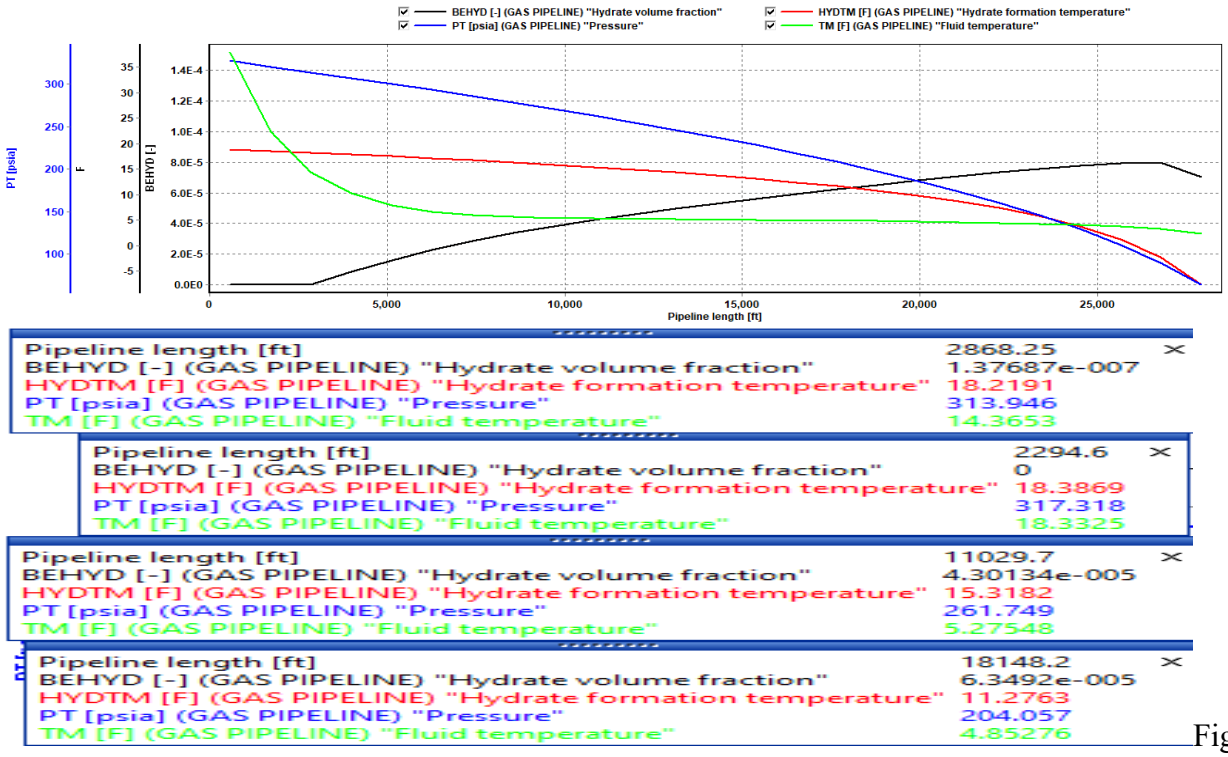


Figure 17: Section and hydrate variable for the addition of 40 mass percent of MEG

Figure 18 shows the effect of 40 mass percent concentration of MEG on the difference between the hydrate equilibrium temperature and the fluid temperature (DTHYD). The result shows that at the beginning of the pipeline, the variable DTHYD was negative before it changes to positive at some point along the pipeline length. Also, it was far more negative when compare with that of 30 mass

percent MEG. Hydrate will be thermodynamically unstable along the section of the pipeline where DTHYD was negative and stable along the section of the pipeline where DTHYD is positive.

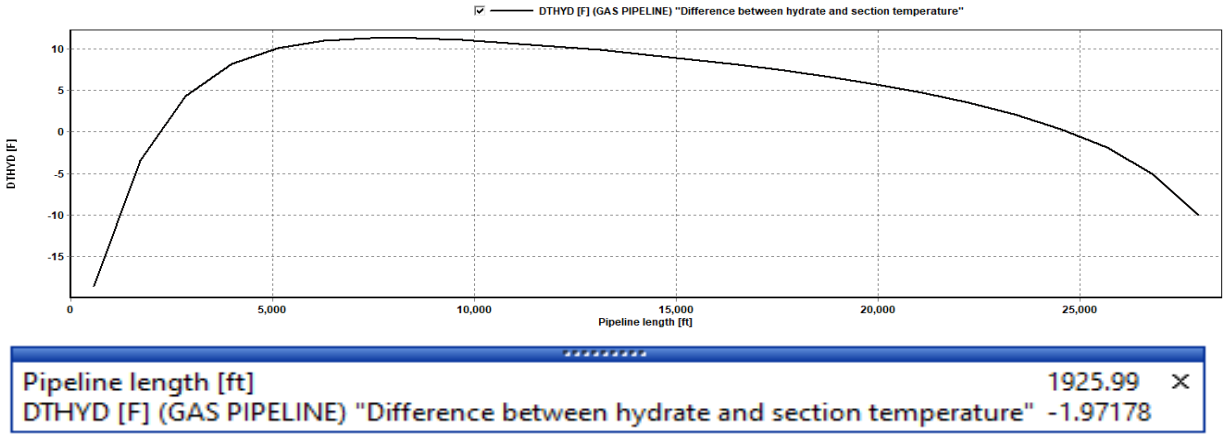


Figure 18: DTHYD for the addition of 40 mass percent of MEG

4.4.5 Effect of 44 mass percent MEG on hydrate formation

This is a case in which 44 mass percent of MEG was added to the fluid system. Figure 19 shows the section and hydrate variable for the entire pipeline length. With the presence of 44 mass percent of MEG in the pipeline, the hydrate was thermodynamically unstable up to 5162.85ft along the pipeline length. At this point, about 1.47292×10^{-7} fraction of hydrate has formed in the pipeline. At 2894.33ft, no hydrate was present in the pipeline at a pressure of 313.21psia and 14.2557°F. Also, at 14967.1ft and a pressure and temperature conditions of 231.077psia and 5.01508°F, 3.12044×10^{-5} volume fraction of hydrate has form in the pipeline. For a pressure and temperature conditions of 206.892psia and 4.85276°F existing at 17757.1ft along the pipeline, 3.62431×10^{-5} volume fraction of hydrate will form at this point.

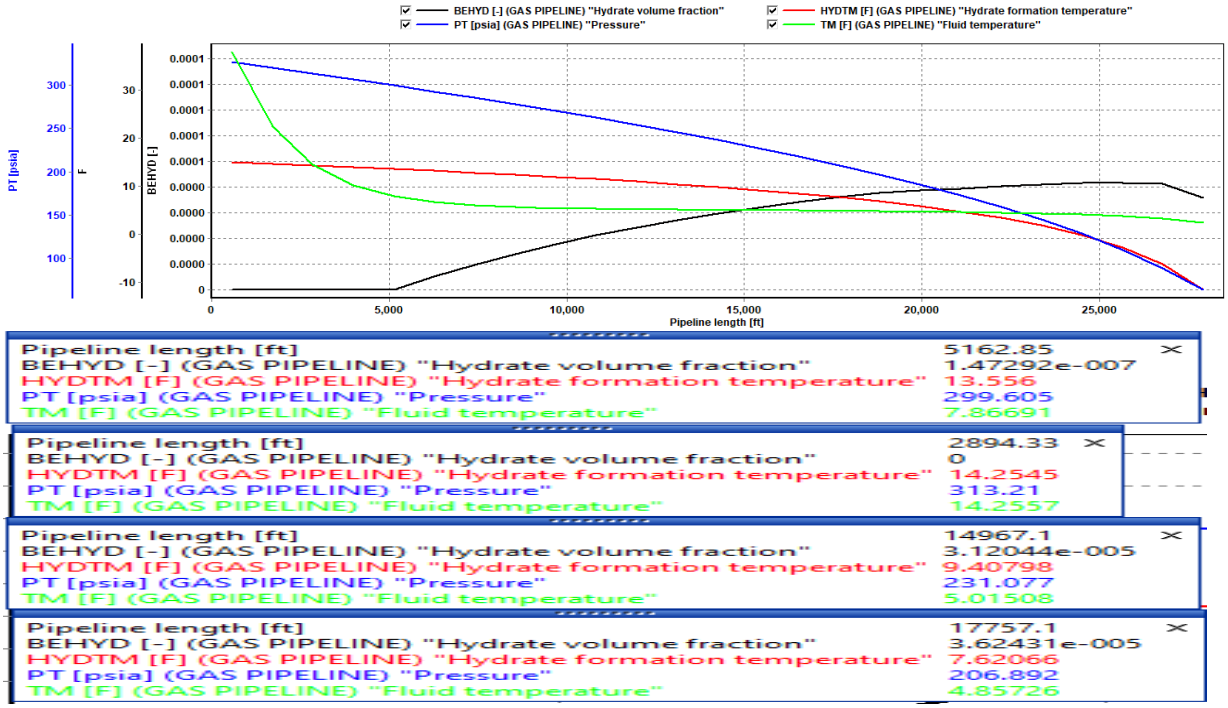


Figure 19: Section and hydrate variable for the addition of 44 mass percent of MEG

Figure 20 shows the effect of 44 mass percent concentration of MEG on the difference between the hydrate equilibrium temperature and the fluid temperature (DTHYD). The figure shows that at the beginning of the pipeline, the variable DTHYD was negative before it changes to positive at some point along the pipeline length. Also, it was far more negative when compare with that of 30 mass percent MEG up to a value -25°F. Hydrate will be thermodynamically unstable along the section of the pipeline where DTHYD was negative and stable along the section of the pipeline where DTHYD

is positive.

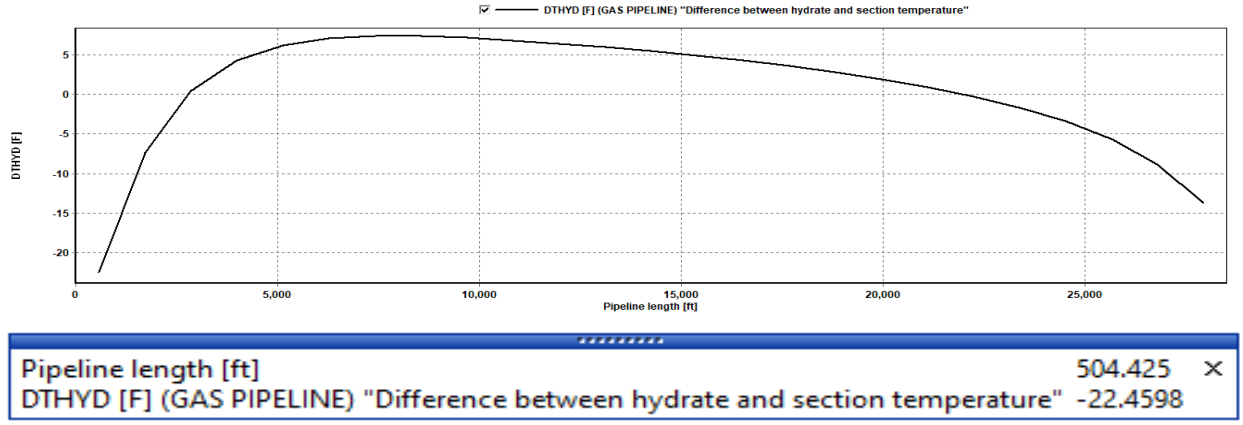


Figure 20: DTHYD for the addition of 44 mass percent of MEG

4.4.6 Effect of 45 mass percent MEG on hydrate formation

This is a case in which 45 mass percent of MEG was added to the fluid system. Figure 21 shows the section and hydrate variable for the entire pipeline length. With the presence of 45 mass percent of MEG in the pipeline, the hydrate was thermodynamically unstable throughout the pipeline length. For the entire pipeline length, the hydrate volume fraction was zero. Thus, no hydrate was formed in the pipeline. At 3102.93ft, no hydrate was present in the pipeline at a pressure of 312.164psia and 13.48°F. For a pressure and temperature conditions of 184.012psia and 4.66149°F existing at 20077.8ft along the pipeline, zero volume fraction of hydrate will form at this point.

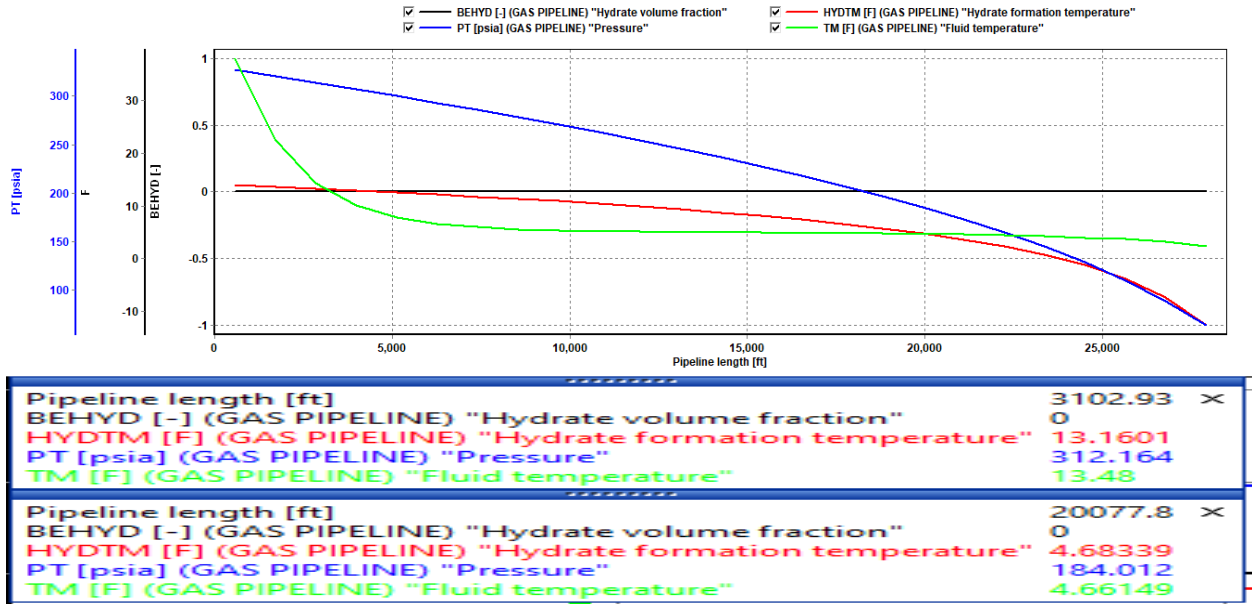


Figure 21: Section and hydrate variable for the addition of 45 mass percent of MEG

Figure 22 shows the effect of 45 mass percent concentration of MEG on the difference between the hydrate equilibrium temperature and the fluid temperature (DTHYD). The figure shows that at the beginning of the pipeline, the variable DTHYD was negative before it changes to positive at some point along the pipeline length and then falling back to negative at the pipeline outlet. Note that this variable was positive along the pipeline but yet no hydrate formation was observed in the pipeline.

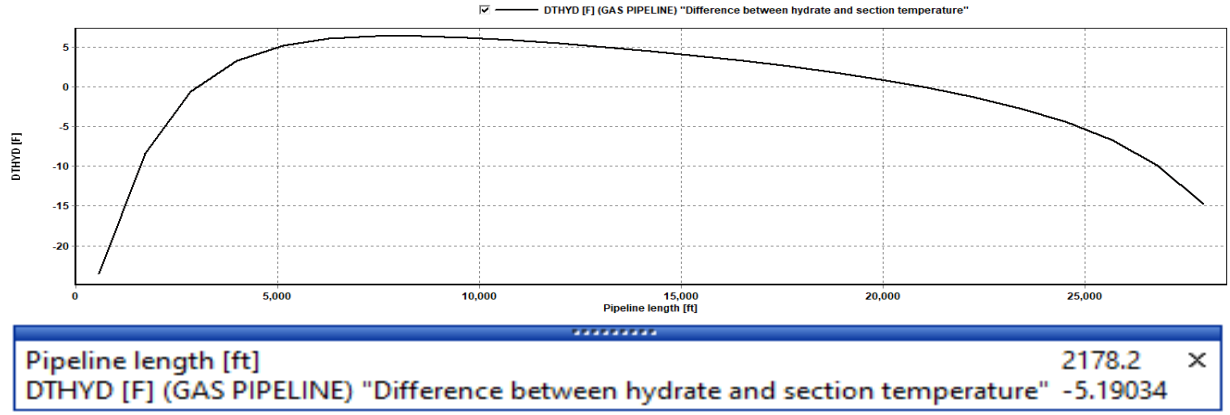


Figure 22: DTHYD for the addition of 45 mass percent of MEG

4.0 CONCLUSION

This work evaluates the effect of Monoethylene Glycol in hydrate management and its optimum concentrations for hydrate formation prevention in gas transmission pipeline. A simulation based approach was adopted and OLGA Dynamic Multiphase flow simulator and Multiflash fluid model modelling package were used. The findings revealed that the increase in the mass percent of the MEG increases the length of unstability of the hydrate formation along the pipeline. Additionally, it showed that increase in the mass concentration of the MEG decreases the volume fraction of hydrate formed in the pipeline, and 45 percent mass concentration of MEG inhibited hydrate formation in the gas mixture.

REFERENCES

Akpabio, M. G. (2013). Cold flow in long-distance subsea pipelines. Institutt for petroleumsteknologi og anvendt geofysikk

AlHarooni, K., Barifcani, A., Pack, D. & Ghodkay, V. (2015). Inhibition effects of thermally degraded MEG on hydrate formation for gas systems. Journal of Petroleum Science and Engineering Vol 135, 608-617. doi.org/10.1016/j.petrol.2015.10.001

Brustad, S., Løken, K.-P., & Waalmann, J.G. (2005). Hydrate Prevention using MEG instead of MeOH: Impact of experience from major Norwegian developments on technology selection for injection and recovery of MEG. Presented at the Offshore Technology Conference, Offshore Technology Conference. https://doi.org/10.4043/17355-MS

Hammerschmidt, E.G. (1934). Formation of Gas Hydrates in Natural Gas Transmission Lines. Ind. Eng. Chem. 26, 851–855. https://doi.org/10.1021/ie50296a010

Hubbard, R.A. (1991). Recent Developments in Gas Dehydration and Hydrate Inhibition. Paper presented at the SPE Gas Technology Symposium, Houston, Texas, January.

Katz, D.L., (1945). Prediction of Conditions for Hydrate Formation in Natural Gases. Transactions of the AIME 160, 140–149. https://doi.org/10.2118/945140-G

Koh, C.A., Westacott, R.E., Zhang, W., Hirachand, K., Creek, J.L., & Soper, A.K., 2002. Mechanisms of gas hydrate formation and inhibition. Fluid Phase Equilibria, Proceedings of the Ninth International Conference on Properties and Phase Equilibria for Product and Process Design 194–197, 143–151. https://doi.org/10.1016/S0378-3812(01)00660-4

Lili Z., Sirui Z., Yaxin M., Fangmei J. & Yue Z. (2021). Natural Gas Hydrate Prediction and Prevention Methods of City Gate Stations. Mathematical Problems in Engineering, Article ID 5977460, 1-10.

Long, J. P. & Sloan, E.D. (1996). Hydrates in the ocean and evidence for the location of hydrate formation. *Int J Thermophys* 17, 1–13. https://doi.org/10.1007/BF01448204

Odeigah, E. A. & Pojtanbuntoeng,Thunyaluk (2022). Regeneration and Reclamation of Mono-Ethylene Glycol (MEG) Used as a Hydrate Inhibitor: A Review. American Journal of Chemical Engineering. Vol. 10, No. 2, pp. 32-45. doi: 10.11648/j.ajche.20221002.13

Odutola, T.O., Ikiensikimama, S.S. & Dulu, A. (2014). Chemical Compromise: A Thermo-dynamic and Ionic Solution to Hydrate Inhibition. Paper SPE 172410 presented at SPE Nigeria Annual International Conference and Exhibition, Lagos, Nigeria.

Okereke, N.U., Edet, P.E., Baba, Y.D. *et al., (2020).* An assessment of hydrates inhibition in deepwater production systems using low-dosage hydrate inhibitor and monoethylene glycol. *J Petrol Explor Prod Technol* **10**, 1169–1182. https://doi.org/10.1007/s13202-019-00812-4

Sloan Jr, E.D., Koh, C.A. (2007). Clathrate Hydrates of Natural Gases. CRC Press.

Son, K.V. & Wallace, C. (2000). Reclamation/regeneration of glycols used for hydrate inhibition. Deep Offshore Technology.